



FLOTECH HELPS SEAL OUT THE ELEMENTS




FLOW METERS FOR RATIO ADDITIVE BLENDING IN THE WINDOW / DOOR SEAL INDUSTRY

Flotech Solutions have supplied Coriolis Mass Flow Meters to control the blending of various additives in the production of specialised window and door seals. Each type of seal has a different blend to suit the characteristics required.

Key requirements for this application were repeatability at low flow rates, low pressure loss and a need for obstruction free flow paths. Plant vibration was another issue to be considered. Coriolis meters were the preferred choice giving high accuracy, repeatability, obstruction free flow path and low pressure loss even at flows of 5 g/min. The evaluation electronics are mounted locally in a position more convenient for day-to-day monitoring. With a wide range of options including a full range of process connections and certification for use in hazardous areas selection was made very easy.

The results of this installation was an on-time project now producing high-grade products, minimising waste. Flotech solutions can provide your industry with a wide range of flow instrumentation available with many different options to ensure a robust and effective solution for your measuring needs.

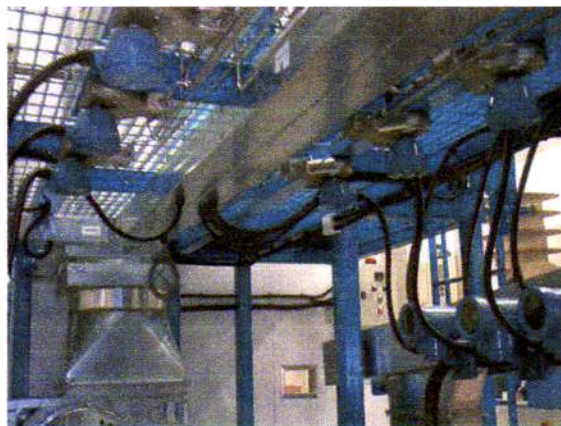

Coriolis units on a ratio additive application



CONTACT DETAILS

Flotech Solutions Limited
Flotech House
Stuart Road
Bredbury
Stockport
SK6 2SR

Tel: 0845 777 6356
Fax: 0161 406 9196
E-Mail: enquiries@flotech.co.uk
Web: www.flotech.co.uk